


RSD96

NON SPRING LOADED RTD NON EXPLOSION PROOF ENCLOSURE



Create your product for enquiry by selecting the appropriate part number as per sequence.

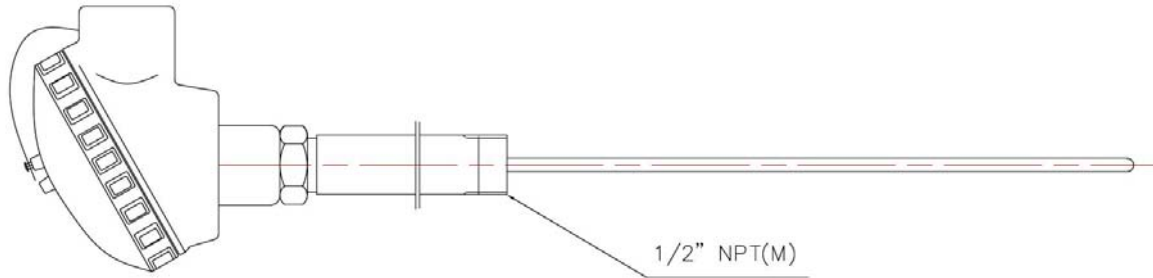

Example:

THIN FILM – SINGLE – DIN BLOCK – 316SS SHEATH – 6mm SHEATH DIAMETER – 300 mm SHEATH LENGTH BELOW HEAD – NIPPLE – 100mm NIPPLE – 1 ADDITIONAL CABLE ENTRY – ½” NPT (F) THREAD – IEC CLASS A TOLERANCE – 0°C CALIBRATION



1	ELEMENT TYPE
A	THIN FILM TYPE
B	WIRE WOUND
2	NO OF ELEMENT
1	SINGLE
2	DUPLEX
3	TERMINAL TYPE
C	CERAMIC DIN BLOCK
FL	FLYING LEAD
4	SHEATH MATERIAL
310	310SS
316	316SS
321	321SS

5	SHEATH DIAMETER (mm)
6	LENGTH BELOW HEAD (mm)
7	PROCESS CONNECTOR TYPE (316 MATERIAL)
N	NIPPLE (S40)
U	NIPPLE UNION NIPPLE
F	FLAME PROOF NIPPLE
W	WELDED NIPPLE
8	LENGTH OF PROCESS CONNECTOR EXCLUDING THREAD (mm)

9	NO OF CABLE ENTRIES (EXCLUDING 1 FOR PROCESS CONNECTOR)
1	ONE
2	TWO
10	CABLE ENTRY THREAD TYPE
A	½”NPT(F)
B	½”BSP(P)
11	CLASS
1	IEC 751 CLASS A
2	IEC 751 CLASS B
12	CALIBRATION POINTS (CELCIUS)
	X / X / X
13	ADDITIONAL REQUIREMENTS
	FOR ADDITIONAL THINGS REQUIREMENTS NOT LISTED ABOVE, PLEASE INCLUDE THEM HERE